






This concealed ceiling-mounted indoor unit series is compact, and fits easily into rooms with lowered ceilings. Highly reliable energy-saving performance makes it a best match choice for concealed unit installations.

Compact Ceiling-concealed Units

Only the intake-air grille and outlet vents are visible when using this ceiling-concealed indoor unit. The rest of the unit is conveniently hidden in the ceiling cavity, essentially leaving the ceiling and walls free of bulky looking devices and maintaining a high-class interior décor. The compact units require minimal space and can be installed in buildings with lowered ceilings, where exposed units were the rule in the past.

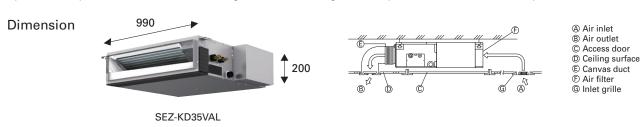

Wide Selection of Fan Speed and Static Pressure Level

Three fan speeds (Low - Mid - High) and four static pressure levels (5 - 15 - 35 - 50Pa) are available by using the DC fan motor to meet various needs.

Drain Pump (Optional)

The PAC-KE07DM-E drain pump is now available as an option. With the pump, a drain hose length of up to 550mm can be used, leading to increased installation possibilities.

























Туре				Cooling Only / Heat Pump				
Model Name				SEZ-KD25VAL	SEZ-KD35VAL	SEZ-KD50VAL	SEZ-KD60VAL	SEZ-KD71VAL
Power Supply (V/Phase/Hz)				Outdoor (230/Single/50)				
Cooling	Air Volume	Lo-Mid-Hi	m³/min	5.5 - 7.0 - 9.0	7.0 - 9.0 - 11.0	10.0 - 12.5 - 15.0	12.0 - 15.0 - 18.0	12.0 - 16.0 - 20.0
	SPL		dB(A)	23 - 26 - 30	23 - 28 - 33	30 - 34 - 37	30 - 34 - 38	30 - 35 - 40
Operating Current (max.)				0.39	0.46	0.63	0.63	0.84
Demensions H×W×D mm			mm	200 - 790 - 700	200 - 990 - 700	200 - 990 - 700	200 - 1190 - 700	200 - 1190 - 700
Weight kg				18	21	23	27	27
Ext.Piping	Diameter	Liquid/Gas	mm	6.35/9.52	6.35/9.52	6.35/12.7	6.35/15.88	9.52/15.88
External Static Pressure				5/15/35/50	5/15/35/50	5/15/35/50	5/15/35/50	5/15/35/50